


2000h, SMD Ultra Low ESR 105°C

· High ripple current capability

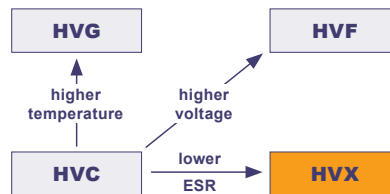

Item	Characteristics		
Category Temperature Range (°C)	-55 ~ +105		
Rated Voltage Range (V _{DC})	2,5 ~ 10		
Capacitance Range (µF)	120 ~ 1200		
Capacitance Tolerance	± 20% (M)	(at 20°C, 120Hz)	
Surge Voltage	Rated Voltage(V)x1,15		
Dissipation Factor (tanδ)	0,12	(at 20°C, 120Hz)	
Leakage Current *1	Please see the attached ratings list	Rated voltage applied, after 2 minutes.	
Equivalent Series Resistance (ESR)	Please see the attached ratings list	(at 20°C, 100kHz)	
Temperature Characteristics (Max. Impedance Ratio)	Z(+105°C) / Z(+20°C) ≤1,25	(at 100kHz)	
	Z(-55°C) / Z(+20°C) ≤1,25		
Life Time	105°C, 2000h Rated voltage applied	Δ C/C	≤±20% of the initial value
		DF (tanδ)	≤ 150% of the initial specified value
		ESR	≤ 150% of the initial specified value
		LC	≤The initial specified value
Damp heat (Steady state)	60°C, 90 to 95% RH 1 000h No-applied voltage	Δ C/C	≤±20% of the initial value
		DF (tanδ)	≤ 150% of the initial specified value
		ESR	≤ 150% of the initial specified value
		LC	≤The initial specified value (after voltage processing)
Resistance to soldering heat	Reflow method (260°C x 5s)	Δ C/C	≤± 10% of the initial value
		DF (tanδ)	≤ 130% of the initial specified value
		ESR	≤ 130% of the initial specified value
		LC	≤The initial specified value (after voltage processing)
*1 please see Handling Precautions and Chapter 4.1 of IEC 60384-26 :2011			

SMD

Multiplier for Ripple Current

Frequency Coefficient

Frequency <i>f</i>	120Hz ≤ <i>f</i> < 1kHz	1kHz ≤ <i>f</i> < 10kHz	10kHz ≤ <i>f</i> < 100kHz	100kHz ≤ <i>f</i> ≤ 500kHz
Coefficient	0,05	0,3	0,7	1

Ratings for HVX Series (order code VX)

U _R Code	Rated Capacitance	ESR (max)	Rated Ripple Current	Leakage Current (max)	Size Ø D x L	Case Code
	20°C, 120Hz	20°C, 100kHz	105°C, 100kHz	20°C, 2 min	(mm)	
(V)	(µF)	(mΩ)	(mA _{rms})	(µA)	(mm)	
2,5 0E	390	9	4000	195	6,3 x 5,7	F60
	470	9	4200	235	6,3 x 7,7	F80
	560	9	4200	280	6,3 x 7,7	F80
		8	5000	280	8 x 6,7	B70
	680	8	5000	340	8 x 6,7	B70
	1000	8	5000	500	8 x 7,7	B80
		8	5400	500	10 x 7,7	C80
1200	8	5400	600	10 x 7,7	C80	
4 0G	330	9	4000	265	6,3 x 5,7	F60
	390	9	4200	315	6,3 x 7,7	F80
	470	8	5000	380	8 x 6,7	B70
	560	8	5000	450	8 x 6,7	B70
	680	8	5000	550	8 x 7,7	B80
		8	5400	550	10 x 7,7	C80
	1000	8	5400	800	10 x 7,7	C80
6,3 0J	220	9	4000	280	6,3 x 5,7	F60
	270	9	4200	340	6,3 x 7,7	F80
	330	9	4200	420	6,3 x 7,7	F80
		9	4500	420	8 x 6,7	B70
	390	8	5000	495	8 x 6,7	B70
	470	8	5000	595	8 x 6,7	B70
	560	9	4500	710	8 x 7,7	B80
	820	8	5400	1035	10 x 7,7	C80
10 1A	120	15	3200	240	6,3 x 5,7	F60
	220	10	3800	440	8 x 6,7	B70
	270	10	3800	540	8 x 6,7	B70
	330	10	3800	660	8 x 6,7	B70
	470	10	5215	940	10 x 7,7	C80
	560	12	4600	1120	10 x 7,7	C80

Customer products are available on request.

Part Number System **Polymer Capacitors**

PC	R	1V	VG	101	M	CAC	LL	50	P	E3	JExxxx
Technology	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code (in μF)	Capacitance Tolerance	Size Code ($\phi\text{D} \times \text{L}$)	Lead Form	Pitch	Material Code	for internal use	for Specials only
PC = Polymer Capacitor	SMD = V	2,0V = 0D	SMD:	0,1 = 0R1	$\pm 20\%$ = M	SMD:	SMD:	SMD:	SMD:		
	Radial = R	2,5V = 0E	HVC = VC	0,47 = R47	$\pm 10\%$ = K	D55 4,0 x 5,2	Taped = FV	Standard -	W = Laminated		
		4V = 0G	HVF = VF	1,0 = 010	+30 / -10% = Q	D60 4,0 x 5,7			P = Plastic		
		6,3V = 0J	HVG = VG	2,2 = 2R2	+20 / -0% = R	E55 5,0 x 5,2	Radial:	Radial:			
		6,8V = 06	HVS = SV	47 = 470	$\pm 15\%$ = L	E60 5,0 x 5,7	Taped = FF	2,0mm = 20			
		7,0V = 07	HVX = VX	100 = 101	+20 / -10% = V	F50 6,3 x 5,0	Long Lead = LL	2,5mm = 25			Radial:
		7,5V = 75		1000 = 102		F55 6,3 x 5,2	Cut 5,0mm = CB	3,5mm = 35			- = Standard
		10V = 1A	Radial:			F60 6,3 x 5,7	Cut 4,5mm = CC	5,0mm = 50			F = Flat Rubber
		12,0V = A1	HCN = CN			B70 8,0 x 6,7	Cut 4,0mm = CD				S = Stand-Off
		12,5V = 1B	HCE = CE			B10 8,0 x 9,7	Cut 3,5mm = CE				
		16V = 1C	HEN = EN			B11 8,0 x 11,0	Cut 3,0mm = CF				
		20V = 1D	HPN = HN			B12 8,0 x 12,2					
		25V = 1E	HPNA = NA			C80 10 x 7,7					
		28V = L1	HGN = GN			C10 10 x 9,7					
		32V = 1F	HEL = EL			C12 10 x 12,2					
		35V = 1V	HSN = SN								
		40V = 1G	HCS = CS								
		50V = 1H	HPF = PF								
		63V = 1J									
		80V = 1K									
		100V = 2A									
		125V = 2B									
		160V = 2C									
		180V = 2K									
		200V = 2D									

Radial:		
D05	4,0	x 5,7
D07	4,0	x 7,0
E05	5,0	x 5,7
E07	5,0	x 7,0
F05	6,3	x 5,7
F06	6,3	x 6,7
F07	6,3	x 7,0
F08	6,3	x 8,0
F09	6,3	x 9,0
F10	6,3	x 10,0
B05	8,0	x 5,7
B06	8,0	x 6,7
B07	8,0	x 7,0
B08	8,0	x 8,0
B09	8,0	x 9,0
B10	8,0	x 10,0
B11	8,0	x 11,0
BAB	8,0	x 11,5
B12	8,0	x 12,0
BAC	8,0	x 12,5
B13	8,0	x 13,0
C08	10	x 8,0
C09	10	x 9,0
C10	10	x 10,0
C11	10	x 11,0
CAB	10	x 11,5
C12	10	x 12,0
CAC	10	x 12,5
C13	10	x 13,0


on request: alternative lead forms
(Keyed polarity, axial, 90°-bended, other)

Polymer

Technical Specification **Radial Type Polymer**

Dimensions for loose, long-lead type (bulk)


Order Code: LL

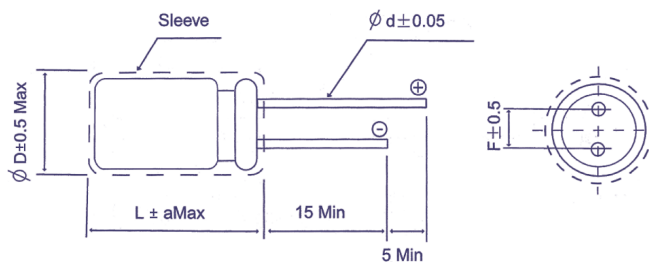

L	L < 7			L ≥ 7			
ϕD	5	6,3	8	5	6,3	8	10
F	2,0	2,5	3,5	2,0	2,5	3,5	5,0
ϕd	0,45			0,5		0,6	
a _{Max}	1,0			2,0			

in mm


Dimensions for loose, cut leads

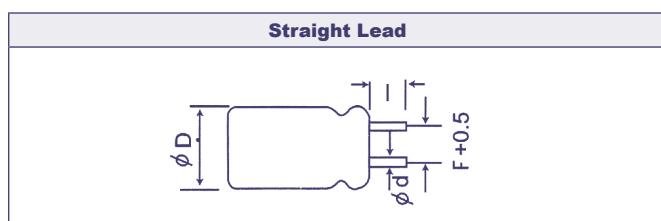

Code	CB	CC	CD	CE	CF
I	5,0±0,5	4,5±0,5	4,0±0,5	3,5±0,5	3,0±0,5

preferred in mm


Dimension for Ammopack Taping

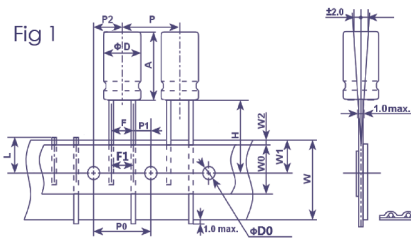

	ΦD	A	P	P0	P1	P2	F	F1	W	W0	W1	W2	H	L	ΦD0	t
	±0,5	±1,0	±1,0	±0,2	±0,5	±1,0	0,8/-0,2	±1,0	±0,5	min	±0,5	max	0,75/-0,5	max	±0,5	±0,3
Φ 5 x 5	5	5	12,7	12,7	5,35	6,35	2,0	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 5 x 7	5	7	12,7	12,7	5,35	6,35	2,0	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 5 x 8	5	8	12,7	12,7	5,35	6,35	2,0	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 5 x 9	5	9	12,7	12,7	5,35	6,35	2,0	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 5 x 10	5	10	12,7	12,7	5,35	6,35	2,0	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 6,3 x 5	6,3	5	12,7	12,7	5,1	6,35	2,5	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 6,3 x 8	6,3	8	12,7	12,7	5,1	6,35	2,5	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 6,3 x 10	6,3	10	12,7	12,7	5,1	6,35	2,5	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 6,3 x 11,5	6,3	11,5	12,7	12,7	5,1	6,35	2,5	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 8 x 6	8	6	12,7	12,7	4,6	6,35	3,5	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 8 x 6,7	8	6,7	12,7	12,7	4,6	6,35	3,5	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 8 x 8	8	8	12,7	12,7	4,6	6,35	3,5	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 8 x 11,5	8	11,5	12,7	12,7	4,6	6,35	3,5	3,5	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 10 x 7	10	7	12,7	12,7	3,85	6,35	5,0	5,0	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 10 x 9	10	9	12,7	12,7	3,85	6,35	5,0	5,0	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 10 x 10	10	10	12,7	12,7	3,85	6,35	5,0	5,0	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7
Φ 10 x 12,5	10	12,5	12,7	12,7	3,85	6,35	5,0	5,0	18,0	12,0	9,0	1,5	18,5	11,0	4,0	0,7

in mm

Dimension for SMD Type and Dimensions for Taping

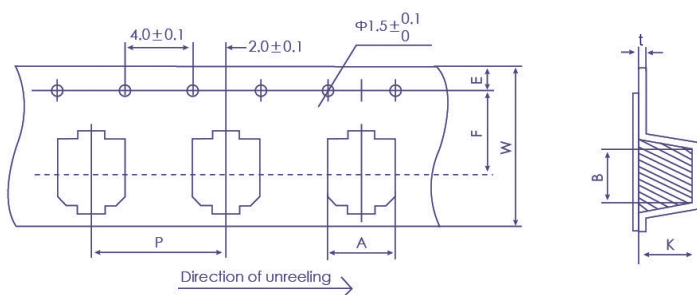


Dimension / Case Code	A	B	W	F	P	K
		±0,2	±0,2	±0,3	±0,1	±0,1
F60	7,0	7,0	16,0	7,5	12,0	6,3
F80	7,0	7,0	16,0	7,5	12,0	8,2
F10	7,0	7,0	24,0	11,5	16,0	10,2
B70	8,7	8,7	24,0	11,5	12,0	7,3
B80	8,7	8,7	24,0	11,5	12,0	8,3
B10	8,7	8,7	24,0	11,5	16,0	10,2
B12	8,7	8,7	24,0	11,5	16,0	13,0
C80	10,7	10,7	24,0	11,5	16,0	8,3
C10	10,7	10,7	24,0	11,5	16,0	11,0
C12	10,7	10,7	24,0	11,5	16,0	13,0

in mm


E = 1,75 ± 0,1 mm
T = 0,4 ± 0,1 mm

Real Dimensions

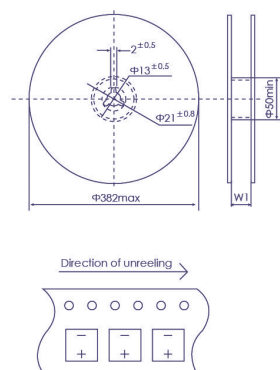

Case Code	Quantity (pcs/reel)	W1 (mm)
F60	1000	18
F80	900	18
F10	500	26
B70	1000	26
B80	900	26
B10	500	26
B12	400	26
C80	500	26
C10	500	26
C12	400	26


Recommended Soldering Pad



Φ D (code)	a	b	c
Φ 6,3 (F)	1,9	3,5	1,6
Φ 8 (B)	3,1	4,2	2,2
Φ 10 (C)	4,5	4,4	2,2

in mm

Recommended Soldering Profile SMD

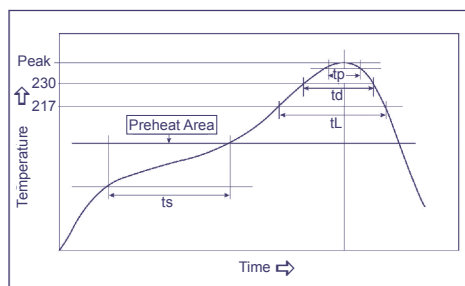

Voltage Range (Vdc)	Preheat	Time maintained above 217°C	Time maintained above 230°C	Peak Temperature
2,5 ~ 16V	150~180°C 60~120 seconds	50 seconds max.	40 seconds max.	260°C max.
20 ~ 200V	150~180°C 60~120 seconds	50 seconds max.	40 seconds max.	250°C max.

Only 1 reflow soldering cycle allowed. All temperatures are measured on the topside of the Al-can.

Jianghai Electrolytic Capacitors

Warning: JIANGHAI is not responsible for any extent of possible damages to persons or things, of any kind, caused by the improper application of and/or operating conditions harmful to electrolytic capacitors.

Misapplications which may cause failures include, but are not limited to: * Ripple current or peak current or voltage above specification, * Operating voltage above surge voltage specified, * Temperature exposure beyond specified operating temperature range.

Examples of harmful operating conditions comprise, but are not limited to: * unusual storage or transport temperatures, * excessive and/or rapid changes of ambient temperature or humidity, * heavy mechanical shock or vibration, * corrosive and abrasive particles in the ambient (cooling) air, * conducting dust in the ambient (cooling) air, * oil or water vapor or corrosive substances, * explosive gas or dust, * operation under extremely high or low ambient pressure conditions (below or above sea level), * superimposed radio frequency voltages, * radioactivity. In case of doubt about the impact of operating conditions on capacitor performance, please contact JIANGHAI.

Personal Safety: Electrical or mechanical misapplication of electrolytic capacitors may be hazardous. Personal injury or property damage may result from explosion of a capacitor or from the expulsion of electrolyte due to mechanical disruption or the release of a safety vent of a capacitor. In case of injury or skin or eye exposure to electrolyte, immediately seek professional medical advice. Before using electrolytic capacitors in any application, please read these Handling Precautions, familiarizing thoroughly with the information contained herein. Please check before using any of our electrolytic capacitors if these components fulfill the requirements of your application and warnings and instructions for use are followed.

Warranty: The information contained in this catalogue does not form part of any quotation or contract, is believed to be accurate, reliable and up to date. Quality data are based on the statistical evaluations of a large quantity of parts and do not constitute a guarantee in a legal sense. However, agreement on these specifications does mean that the customer may claim for replacement of individual defective capacitors within the terms of delivery. We will not assume any liability beyond the replacement of defective components. This applies in particular to any consequential damage caused by component failure. Furthermore it must be taken into consideration that the figures stated for lifetime, failure rates and outlier percentages refer to the average production status and are therefore to be understood as mean values (statistic expectations) for a large number of delivery lots of identical capacitors. These figures are based on application experience and data obtained from preceding tests under normal conditions, or – for purpose of accelerated aging – more severe conditions. JIANGHAI reserves the right to change these specifications without prior notice. Any application information given is advisory and does not form part of any specification. The products are not primarily designed for use in life support applications, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. JIANGHAI customers using or selling these products for use in such applications without prior written consent of JIANGHAI do so at their own risk and agree fully to indemnify JIANGHAI for any damage resulting from such improper use or sale. This version of the catalogue supersedes all previous versions. Latest versions of datasheets can be found on our homepage: www.jianghai-europe.com For more details on precautions and guidelines for aluminum electrolytic capacitors, please refer to CENELEC Technical Report CLC/TR 50454:2008 E, "Guide for the application of aluminum electrolytic capacitors".

Polarity: Electrolytic capacitors are polar and shall never be used with incorrect polarity, as there is a possible danger of shorting or destruction.

Rated Voltage Ur: The Rated Voltage is marked on the capacitor and defined in the datasheets as Ur. This voltage should never be exceeded and is the maximum peak voltage including any ripple voltages allowed to avoid a shortening of the lifetime or damage of the capacitor. When a ripple current is applied to the capacitor, the sum of the peak ripple voltage and bias DC voltage shall never exceed the Rated Voltage. It might be necessary to lower the maximum allowed bias DC voltage, when certain ripple currents are applied to the capacitor.

Surge Voltage: Maximum Voltage, which may be applied to the capacitor for short periods of time: max. 1000 cycles of 30 sec. per 6 min., max. 5 pulses per hour. Capacitance drift +/- 15% max.

Reverse Voltage: Reverse voltages or voltages < 0 V are not allowed.

Recovery Voltage: After charging and discharging a capacitor there might still be a voltage between the terminals, which is built up internally due to dielectric absorption. Please take action that this load does not damage other devices or scare the workers during production (sparks possible).

Temperature Range: Use electrolytic capacitors only within the specified operating temperature range.

Over-Current: Currents exceeding the rated ripple currents should be avoided.

Ripple Current/Voltage: The combined value of DC voltage and peak AC voltage (due to ripple current) shall not exceed the rated voltage and shall never be < 0 V. Use of aluminum electrolytic capacitors under ripple current with wide amplitudes is equivalent to quick charge-discharge operation.

Rapid Charging/Discharging: Rapid Charging/Discharging generates severe heat and gas may be emitted which may lead to explosion. Consult JIANGHAI about specially designed capacitors suitable for such kind of applications. Example: Servo Drive Application

Balancing resistors: Balancing resistors should be utilized if capacitors are used in serial connection. Please choose low-tolerance resistors to limit voltage drift.

Charge-Discharge Proof: JIANGHAI capacitors are charge-discharge proof, which means that 10⁶ switching cycles will cause capacitance reduction of less than 10%.

Lifetime: There are many different lifetime definitions known without any true standard definition. Take special care when capacitors are compared that the capacitors fulfill the needed requirements. JIANGHAI publishes all conditions to be as transparent as possible. In the case of lifetime tests with additional ripple currents, the bias DC voltage must be reduced, so that the sum of bias DC voltage and the peak of the ripple voltage does not exceed the Rated Voltage Ur.

• **Load Life:** Period of time, during which the technical parameters of all capacitors stay within the given limits. JIANGHAI defines this without allowing for outliers.

• **Useful Life:** defined like load life, but a given percentage of components may be outside the defined limits. Useful life data are usually calculated within a confidence level of 60%. See further details in specifications and data sheets. Outlier percentage: ≤ 1%.

• **Endurance Test:** IEC 60384-4 defines the acceptable drift criteria of electrical parameters after the endurance tests (continuous voltage test).

• **Shelf Life:** Definition of time with acceptable drift of capacitor parameters after storage at upper category temperature without load. JIS-C-5102-1994

Vibration and mechanical stress: Capacitors are sensitive to vibration and mechanical forces applied on the leads. Do not use capacitors, which have been dropped onto a rigid surface.

Insulation: If any defect of the sleeve is visible, the component should not be used – same for any kind of visible damage. A capacitor should be electrically isolated from the following parts: Aluminum case, cathode lead wire, anode lead wire and circuit pattern, and auxiliary terminal of snap-in type. The PVC sleeve is not recognized as an isolator and therefore the standard capacitor should not be used in a place where insulation function is needed. Please contact JIANGHAI if higher grade of insulation is required.

Environmental Conditions:

- Avoid direct contact with water, salt solution, oil, dewing conditions
- Halogens generally, especially fumigation treatment with bromides and flame retardant agents containing halogens must be avoided.
- Avoid exposing to direct sunshine, ozone, ultraviolet rays and x-ray radiation.
- Air Pressure: Max. 150kPa, min. 8kPa.
- No heavy air pressure changes are allowed.
- Do not use or store in an environment containing any hazardous gas (e.g., hydrogen sulphide, sulphurous acid, nitrous acid, chlorine, ammonia, bromine, methyl bromide, other halogens) or acidic or alkaline solutions.

Storage:

- Temperature 5 to 35°C, Relative Humidity below 75%.
- Electrolytic capacitors may accumulate charge naturally during storage. In this case discharge through a 1kOhm resistor before use (Recovery Voltage).
- Leakage current may be increased after long storage time. In this case the capacitor should be subjected to the rated voltage treatment through a 1kOhm resistor before use for 1 hour, then it should be discharged through a resistor of about 1 Ohm/Volt.
- Storage times above 1 year should be avoided or rated voltage treatment may be necessary.
- In accordance to IEC 60384-4 electrolytic capacitors are subject to a reforming process before acceptance testing. Rated voltage is applied via a series resistance (100Ω: Ur ≤ 100VDC, 1kΩ: Ur > 100VDC).

Soldering: Soldering conditions (temperature, times) should be within specified conditions, especially for SMD components. Avoid high soldering temperatures as this may reduce lifetime or damage the capacitor. Do never dip the capacitor body into molten solder. Flux should not be adhered to the capacitor's body but only to its terminals. For details and different methods please contact us.

Cleaning and Coating: Do not use fixing agents or cleaning substances containing halogens and the epoxy resin coating materials. Also never use solvents containing: Halogenated hydrocarbons, alkali, petroleum, trichloroethylene/ethane, xylene, acetones, trichlorotrifluoroethane, tetrachloroethylene, methylenechloride, chloroform, acetates, ketones, esters, chlorides and bromides. In case of questions see detailed instructions.

Mounting: Other devices, which are mounted near the capacitor, should not touch the capacitor. Additional heat coming from other components near the capacitor may reduce the lifetime of the capacitor. Do never bend or twist the capacitor after soldering to avoid stress on the leads. Radial capacitors are not protected against mechanical forces on the leads. Forces on the pins might damage the capacitor. No printed circuit board tracks are allowed between the lead pads of the capacitor. Screw Terminal capacitors should only be mounted in an upright position.

Transport: Avoid fumigation and spraying insecticides (especially with bromides) in the import or export procedures which can cause corrosion. This applies also to the finished devices.

Maintenance: Periodical inspection should be carried out for the capacitor: visual inspection to check pressure relief open or leakage of electrolyte, electrical characteristics as leakage current, capacitance, and dissipation factor.

Electrolyte and Separator paper: Electrolyte and separator paper used in Aluminum Capacitors may be flammable. Also electrolyte is electrically conductive. Therefore in case electrolyte gets in contact with PC board it may cause corrosion of circuit pattern or cause short circuit between patterns, and may lead to smoke generation or ignition in worst case.

Caution during Use of Capacitors: Do not touch the terminals of capacitors. Keep the capacitor free from conductive solution, such as acids, alkali and so on. Ensure that the operating environment of the equipment into which the capacitor has been built is within the specified conditions mentioned in the catalogue or specification sheets.

Safety Vent: The safety vent needs some free space to open properly. Allow for free headroom of at least 2mm for diameter ≤16mm, more than 3mm for diameter 18-35mm, more than 5mm for case diameter 40mm and larger.

Emergency Actions: When the pressure relief vent is open and some gas blows out from the capacitor, please turn the main switch of the equipment off or pull out the plug from the power outlet immediately. During safety vent operation, extremely hot gas (>100°C) may blow out of the capacitors. Do not stand close to the capacitors. In case of eye contact, rinse the open eye(s) with clean water immediately. In case of ingestion, gargle with water immediately, do not swallow. Do not touch electrolyte but wash skin with soap and water in case of skin contact.

Definition of electrical parameters: Separate documents as application notes, equivalent circuit diagrams and so on are available on request.

Packaging: Please refer to the data book for details. Further information is available on request.