




ALUMINUM ELECTROLYTIC CAPACITORS · SMT TYPE

CD **VZL** VZL SERIES



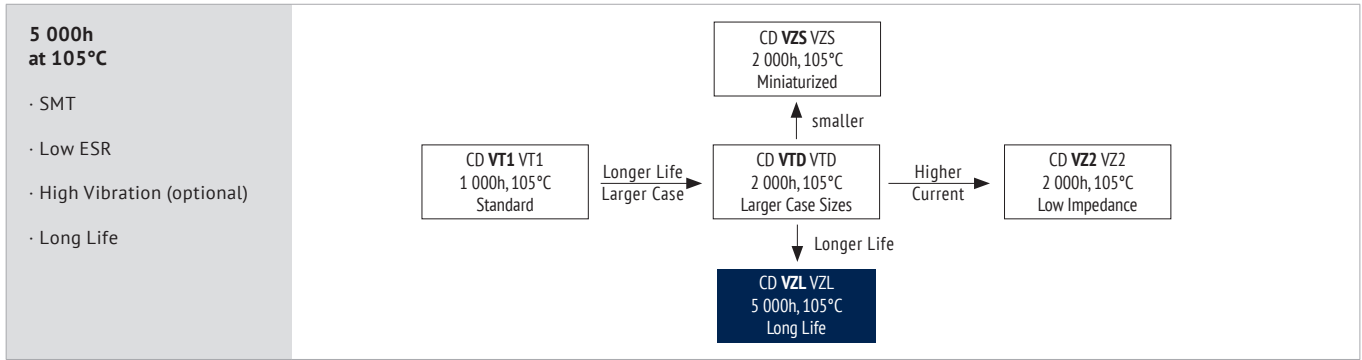

ITEM CHARACTERISTICS STABILTY AT LOW TEMPERATURE (IMPEDANCE RATIO AT 120HZ)

Operating Temperature Range (°C)	-55 ~ +105
Voltage Range (V)	6,3 ~ 100
Capacitance Range (µF)	22 ~ 2 200
Capacitance Tolerance (20°C, 120Hz)	± 20%
Dissipation Factor	at 20°C, 120Hz, see table
Leakage Current (µA)	at 20°C after 2 minutes

Rated Voltage	6,3	10	16	25	35	50	63	80	100
Z _{-40°C/+20°C}	3	3	3	3	3	3	3	3	3

ITEM	LOAD LIFETIME L ₀	SHELF LIFE	RESISTANCE TO SOLDERING HEAT SMT
Lifetime	5 000h	1 000h	30sec, Hot Plate
Leakage Current	≤ the specified value	≤200% the specified value	≤ the specified value
Capacitance Change	Within ± 30% of initial value	Within ± 20% of initial value	Within ± 10% of initial value
Dissipation Factor	≤ 300% of specified value	≤ 200% of specified value	≤ specified value
Condition	105°C U _R I _R = 0 Before measurement: 16h resuming	105°C U _R = 0 I _R = 0 Before measurement: 16h resuming	250°C Before measurement: Restore to 15°C

MULTIPLIER FOR RIPPLE CURRENT (FREQUENCY COEFFICIENT)


µF \ Frequency	120Hz	1kHz	10kHz	≥100kHz
22~180	0,40	0,75	0,90	1,0
220~560	0,50	0,85	0,94	1,0
≥680	0,60	0,87	0,95	1,0

Multipliers for typical operating conditions.

ENVIRONMENTAL

The products are RoHS, WEEE and REACH compliant. The detailed version please see separate "Environmental Certificates" document or www.jianghai-europe.com

MULTIPLIER FOR LIFETIME (LIFETIME DIAGRAM)

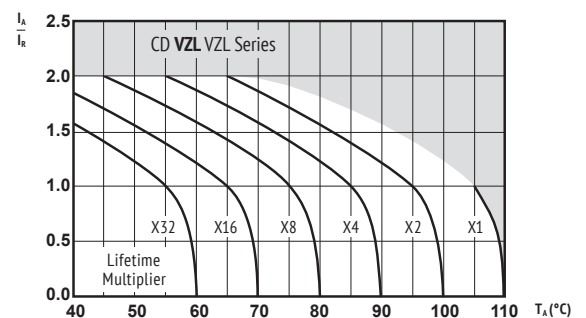

I_a = actual ripple current at 100kHz,
I_r = rated ripple current at 100kHz, 105°C
Multiplier of Useful Life as a function of ambient temperature & ripple current load





U _{RDC} Rated Voltage (Surge Voltage) Code	C _R Rated Capacitance 20°C	ESR _{max} Equivalent Series Resistance 20°C 120Hz	Z _{max} Max. Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I _{leak} Leakage Current 20°C 2min	I _R Rated Ripple Current 105°C 100kHz	Size øD x L	Ordercode Δ = Vibration Type
6,3 (7,3) 0J	220	1 689	360	0,28	14	280	6,3 x 7,7	ECV0JVZL221M0607V1XE3
		1 126	360	0,28	21	280	8 x 6,2	ECV0JVZL331M0806V1ΔE3
	330	1 126	170	0,28	21	450	8 x 10,2	ECV0JVZL331M0810V1ΔE3
		791	170	0,28	30	450	8 x 10,2	ECV0JVZL471M0810V1ΔE3
	1 000	372	170	0,28	63	450	8 x 10,2	ECV0JVZL102M0810V1ΔE3
	1 500	248	170	0,28	95	450	8 x 10,2	ECV0JVZL152M0810V1ΔE3
2 200	181	70	0,30	139	820	12,5 x 13,5	ECV0JVZL222M1213V1ΔE3	
10 (11,5) 1A	220	1 448	360	0,24	22	280	6,3 x 7,7	ECV1AVZL221M0607V1XE3
		1 448	360	0,24	22	280	8 x 6,2	ECV1AVZL221M0806V1ΔE3
	330	965	170	0,24	33	450	8 x 10,2	ECV1AVZL331M0810V1ΔE3
		678	170	0,24	47	450	8 x 10,2	ECV1AVZL471M0810V1ΔE3
	1 000	319	100	0,24	100	670	10 x 10,2	ECV1AVZL102M1010V1ΔE3
	1 500	213	90	0,24	150	750	10 x 12,5	ECV1AVZL152M1012V1ΔE3
2 200	157	60	0,26	220	950	12,5 x 16,0	ECV1AVZL222M1216V1ΔE3	
16 (18,4) 1C	150	1 769	360	0,20	24	280	6,3 x 7,7	ECV1CVZL151M0607V1XE3
		1 769	360	0,20	24	280	8 x 6,2	ECV1CVZL151M0806V1ΔE3
	220	1 206	360	0,20	36	280	6,3 x 7,7	ECV1CVZL221M0607V1XE3
		804	170	0,20	53	450	8 x 10,2	ECV1CVZL331M0810V1ΔE3
	470	565	170	0,20	76	450	8 x 10,2	ECV1CVZL471M0810V1ΔE3
		565	100	0,20	76	670	10 x 10,2	ECV1CVZL471M1010V1ΔE3
	1 000	266	100	0,20	160	670	10 x 10,2	ECV1CVZL102M1010V1ΔE3
	1 500	177	70	0,20	240	820	12,5 x 13,5	ECV1CVZL152M1213V1ΔE3
2 200	133	54	0,22	352	1 260	16 x 16,5	ECV1CVZL222M1616V1ΔE3	
25 (29) 1E	100	2 123	360	0,16	25	280	6,3 x 7,7	ECV1EVZL101M0607V1XE3
		2 123	360	0,16	25	280	8 x 6,2	ECV1EVZL101M0806V1ΔE3
	150	1 415	170	0,16	38	450	8 x 10,2	ECV1EVZL151M0810V1ΔE3
		965	170	0,16	55	450	8 x 10,2	ECV1EVZL221M0810V1ΔE3
	330	644	170	0,16	83	450	8 x 10,2	ECV1EVZL331M0810V1ΔE3
		452	100	0,16	118	670	10 x 10,2	ECV1EVZL471M1010V1ΔE3
	1 000	213	70	0,16	250	820	12,5 x 13,5	ECV1EVZL102M1213V1ΔE3
	1 500	142	60	0,16	375	950	12,5 x 16,0	ECV1EVZL152M1216V1ΔE3
2 200	109	54	0,18	550	1 260	16 x 16,5	ECV1EVZL222M1616V1ΔE3	
35 (40) 1V	47	3 670	360	0,13	17	280	6,3 x 7,7	ECV1VVZL470M0607V1XE3
	100	1 725	170	0,13	35	450	8 x 10,2	ECV1VVZL101M0810V1ΔE3
		1 150	170	0,13	53	450	8 x 10,2	ECV1VVZL151M0810V1ΔE3
	220	784	170	0,13	77	600	8 x 10,2	ECV1VVZL221M0810V1ΔE3
		784	120	0,13	77	670	10 x 10,2	ECV1VVZL221M1010V1ΔE3
	330	523	120	0,13	116	670	10 x 10,2	ECV1VVZL331M1010V1ΔE3
		367	90	0,13	165	700	10 x 12,5	ECV1VVZL471M1012V1ΔE3
	470	367	70	0,13	165	820	12,5 x 13,5	ECV1VVZL471M1213V1ΔE3
		173	60	0,13	350	950	12,5 x 16,0	ECV1VVZL102M1216V1ΔE3
	1 500	115	54	0,13	525	1 260	16 x 16,5	ECV1VVZL152M1616V1ΔE3
2 200	91	38	0,15	770	1 750	18 x 21,5	ECV1VVZL222M1821V1ΔE3	
50 (58) 1H	33	4 020	1000	0,10	17	185	6,3 x 7,7	ECV1HVZL330M0607V1XE3
		2 823	680	0,10	24	185	6,3 x 7,7	ECV1HVZL470M0607V1XE3
	47	2 823	680	0,10	24	185	8 x 6,2	ECV1HVZL470M0806V1ΔE3
		1 951	340	0,10	34	369	8 x 10,2	ECV1HVZL680M0810V1ΔE3
	100	1 327	180	0,10	50	553	10 x 10,2	ECV1HVZL101M1010V1ΔE3
	220	603	120	0,10	110	650	12,5 x 13,5	ECV1HVZL221M1213V1ΔE3
		402	120	0,10	165	650	12,5 x 13,5	ECV1HVZL331M1213V1ΔE3
	470	283	100	0,10	235	850	12,5 x 16,0	ECV1HVZL471M1216V1ΔE3
		283	73	0,10	235	1 000	16 x 16,5	ECV1HVZL471M1616V1ΔE3
	1 000	133	73	0,10	500	1 000	16 x 16,5	ECV1HVZL102M1616V1ΔE3
1 200	111	50	0,10	600	1 910	16 x 21,5	ECV1HVZL222M1621V1ΔE3	
63 (73) 1J	22	4 824	900	0,08	14	150	6,3 x 7,7	ECV1JVZL220M0607V1XE3
	33	3 216	500	0,08	21	280	8 x 10,2	ECV1JVZL330M0810V1ΔE3
		2 258	500	0,08	30	280	8 x 10,2	ECV1JVZL470M0810V1ΔE3
	47	2 258	500	0,08	30	280	8 x 10,2	ECV1JVZL470M0810V1ΔE3
	68	1 561	250	0,08	43	450	10 x 10,2	ECV1JVZL680M1010V1ΔE3
	100	1 062	250	0,08	63	450	10 x 10,2	ECV1JVZL101M1010V1ΔE3
220	483	150	0,08	139	700	12,5 x 13,5	ECV1JVZL221M1213V1ΔE3	

>>





U_{RDC} Rated Voltage (Surge Voltage) Code	C_R Rated Capacitance 20°C	ESR_{max} Equivalent Series Resistance 20°C 120Hz	Z_{max} Max. Impedance 20°C 100kHz	tanδ Dissipation Factor 20°C 120Hz	I_{leak} Leakage Current 20°C 2min	I_R Rated Ripple Current 105°C 100kHz	Size øD x L (mm)	Ordercode Δ = Vibration Type Details: Page 5
(V)	(μF)	(mΩ)	(mΩ)		(μA)	(mA)		
63 (73) 1J	330	322	82	0,08	208	900	16 x 16,5	ECV1JVZL331M1616V1ΔE3
	470	226	82	0,08	297	900	16 x 16,5	ECV1JVZL471M1616V1ΔE3
	1 000	107	60	0,08	630	1 250	18 x 21,5	ECV1JVZL102M1821V1ΔE3
	1 200	89	60	0,08	756	1 350	18 x 21,5	ECV1JVZL122M1821V1ΔE3
80 (92) 1K	22	4 824	1 300	0,08	18	130	8 x 10,2	ECV1KVZL220M0810V1ΔE3
	33	3 216	1 300	0,08	27	130	8 x 10,2	ECV1KVZL330M0810V1ΔE3
	47	2 258	700	0,08	38	200	10 x 10,2	ECV1KVZL470M1010V1ΔE3
	68	1 561	700	0,08	55	200	10 x 10,2	ECV1KVZL680M1010V1ΔE3
	100	1 062	700	0,08	80	200	10 x 10,2	ECV1KVZL101M1010V1ΔE3
	220	483	260	0,08	176	550	12,5 x 16,0	ECV1KVZL221M1216V1ΔE3
	330	322	170	0,08	264	650	16 x 16,5	ECV1KVZL331M1616V1ΔE3
	470	226	150	0,08	376	900	16 x 21,5	ECV1KVZL471M1621V1ΔE3
100 (115) 2A	22	4824	1 300	0,08	22	130	8 x 10,2	ECV2AVZL220M0810V1ΔE3
	33	3216	700	0,08	33	200	10 x 10,2	ECV2AVZL330M1010V1ΔE3
	47	2 258	700	0,08	47	200	10 x 10,2	ECV2AVZL470M1010V1ΔE3
	68	1 561	320	0,08	68	450	12,5 x 13,5	ECV2AVZL680M1213V1ΔE3
	100	1 062	320	0,08	100	450	12,5 x 13,5	ECV2AVZL101M1213V1ΔE3
	220	483	170	0,08	220	650	16 x 16,5	ECV2AVZL221M1616V1ΔE3
	330	322	150	0,08	330	900	16 x 21,5	ECV2AVZL331M1621V1ΔE3
	470	226	150	0,08	470	950	18 x 21,5	ECV2AVZL471M1821V1ΔE3






ORDER CODE ALUMINUM ELECTROLYTIC CAPACITORS SMT TYPE

EC	V		1V		VT1		101		M		0607		V1		X		E3	JExxxxx
Technology	Terminal Type		Rated Voltage Code		Series Code		Capacitance Code (µF)		Capacitance Tolerance		Size Code (ΦDxL)		Lead Form		Pitch		for internal use	for Specials only
EC = Electrolytic Capacitor	SMT	V	6,3	0J	CD VT1	VT1	0,1	OR1	±20%	M	0405	4,0 x 5,4	Standard	V1	Standard	X		
		10	1A	CD VZ2	VZ2	0,22	R22	±10%	K	0506	5,0 x 6,0			Vibration	G			
		16	1C	CD VTD	VTD	0,47	R47	+30/-10%	Q	0605	6,3 x 5,4							
		25	1E	CD VZL	VZL	1	10	preferred		0606	6,3 x 6							
		35	1V	CD VZS	VZS	2,2	2R2			0607	6,3 x 7,7							
		50	1H			3,3	3R3			0806	8 x 6,2							
		63	1J			4,7	4R7			0810	8 x 10,2							
		80	1K			10	100			1010	10 x 10,2							
		100	2A			22	220			1012	10 x 12,5							
						33	330			1213	12,5 x 13,5							
						47	470			1216	12,5 x 16							
						68	680			1616	16,0 x 16,5							
						82	820			1621	16,0 x 21,5							
						100	101			1816	18,0 x 16,5							
						120	121			1821	18,0 x 21,5							
						150	151											
						180	181											
						220	221											
						330	331											
						470	471											
						560	561											
						680	681											
						820	821											
						1 000	102											
						1 500	152											
				2 200	222													
				4 700	472													
				5 600	562													
				6 800	682													
				10 000	103													
				22 000	223													
				33 000	333													
				68 000	683													






DIMENSIONS FOR SMT TYPE STANDARD

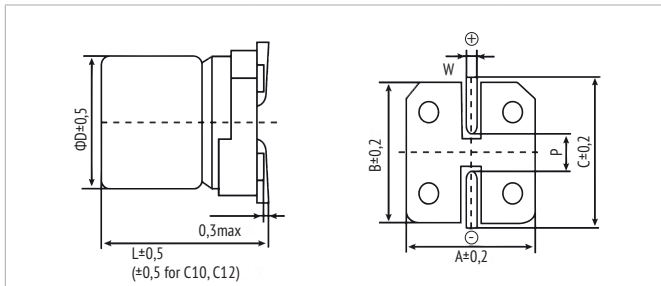


Size Code	$\varnothing D$	L	A	B	C	W	$P \pm 0,2$
0405	4,0	5,4	4,3	4,3	5,0	0,5-0,9	1,0
0505	5,0	5,4	5,3	5,3	6,0	0,5-0,9	1,3
0506	5,0	6,0	5,3	5,3	6,0	0,5-0,9	1,3
0605	6,3	5,4	6,6	6,6	7,2	0,5-0,9	2,2
0606	6,3	6,0	6,6	6,6	7,2	0,5-0,9	2,2
0607	6,3	7,7	6,6	6,6	7,2	0,5-0,9	2,2
0806	8,0	6,2	8,3	8,3	9,0	0,8-1,1	3,1
0810	8,0	10,2	8,3	8,3	9,0	0,8-1,1	3,1
1010	10,0	10,2	10,3	10,3	11,0	0,8-1,1	4,5
1012	10,0	12,5	10,3	10,3	11,0	0,8-1,1	4,5
1213	12,5	13,5	13,0	13,0	13,8	1,1-1,4	5,2
1216	12,5	16,5	13,0	13,0	13,8	1,1-1,4	5,2
1616	16,0	16,5	17,0	17,0	18,0	1,1-1,4	6,5
1621	16,0	21,5	17,0	17,0	18,0	1,1-1,4	6,5
1816	18,0	16,5	19,0	19,0	20,0	1,1-1,4	6,5
1821	18,0	21,5	19,0	19,0	20,0	1,1-1,4	6,5

VIBRATION IMPROVED DESIGN

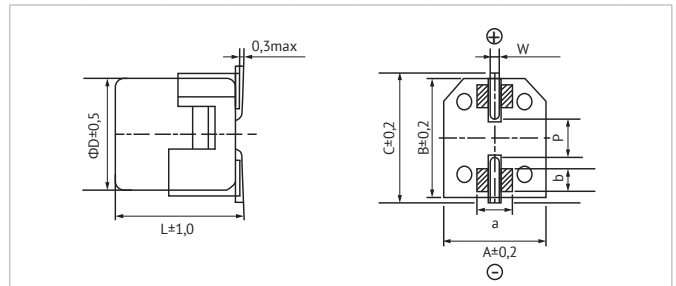

Size Code	$\varnothing D$	L	A	B	C	W	$P \pm 0,2$	a	b
0810	8,0	10,2	8,3	8,3	9,0	0,9-1,1	3,1	4,0	3,0
1010	10,0	10,2	10,3	10,3	11,0	0,9-1,1	4,5	4,4	3,2
1012	10,0	12,5	10,3	10,3	11,0	0,9-1,1	4,5	4,4	3,2
1213	12,5	13,5	13,0	13,0	14,3	1,1-1,4	5,2	4,4	3,2
1216	12,5	16,0	13,0	13,0	14,3	1,1-1,4	5,2	4,4	3,2
1616	16,0	16,5	17,0	17,0	18,0	1,1-1,4	6,5	4,4	3,2
1620	16,0	20,0	17,0	17,0	18,0	1,1-1,4	6,5	4,4	3,2
1621	16,0	21,5	17,0	17,0	18,0	1,1-1,4	6,5	4,4	3,2
1821	18,0	21,5	19,0	19,0	20,0	1,1-1,4	6,5	4,4	3,2

DIMENSIONS FOR TAPING

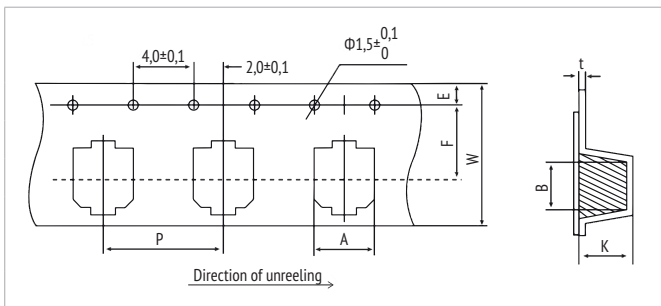


$E = 1,75 \pm 0,1 \text{ mm}$; $t = 0,4 \pm 0,1 \text{ mm}$

Size Code	A	B	W	F	P	K
	$\pm 0,2$	$\pm 0,2$	$\pm 0,3$	$\pm 0,1$	$\pm 0,1$	$\pm 0,2$
0405	4,7	4,7	12,0	5,5	8	5,8
0505	6,0	6,0	12,0	5,5	12,0	5,8
0506	6,0	6,0	12,0	5,5	12,0	5,8
0605	7,0	7,0	16,0	7,5	12,0	5,8
0606	7,0	7,0	16,0	7,5	12,0	8,0
0607	7,0	7,0	16,0	7,5	12,0	8,0
0806	8,7	8,7	16,0	7,5	12,0	8,8
0810	8,7	8,7	24,0	11,5	16,0	11,0
1010	10,7	10,7	24,0	11,5	16,0	11,0
1012	10,7	10,7	24,0	11,5	16,0	13,0
1213	13,4	13,4	32,0	14,2	24,0	14,5
1216	13,4	13,4	32,0	14,2	24,0	17,0
1616	14,5	14,5	44,0	20,2	28,0	17,0
1621	17,5	17,5	44,0	20,2	28,0	22,4
1816	19,5	19,5	44,0	20,2	32,0	17,0
1821	19,5	19,5	44,0	20,2	32,0	22,4






REEL DIMENSIONS

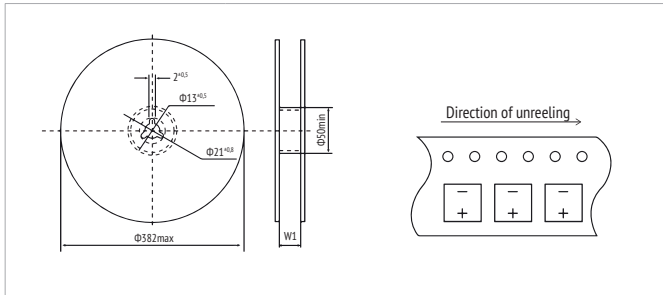

Diameter	W_1 (mm)
4	14
5	14
6,3	18
8	26
10	26
12,5	34
16	46
18	46


RECOMMENDED SOLDERING PAD DIMENSIONS

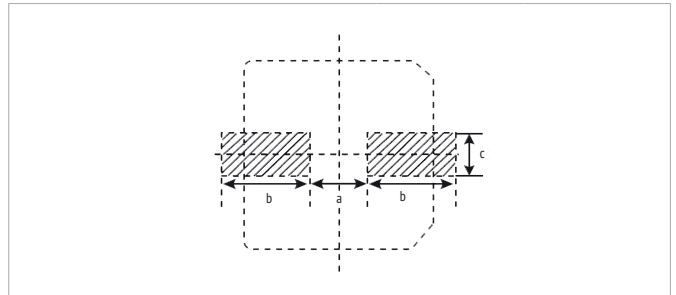

Diameter	a	b	c
4	1,0	2,6	1,6
5	1,4	3,0	1,6
6,3	2,1	3,5	1,6
8	3,0	4,0	2,2
10	4,0	4,6	2,5
12,5	5,0	5,7	3,0
16	7,0	6,5	3,0
18	7,0	7,5	3,0

in mm

RECOMMENDED SOLDERING PROFILE SMT

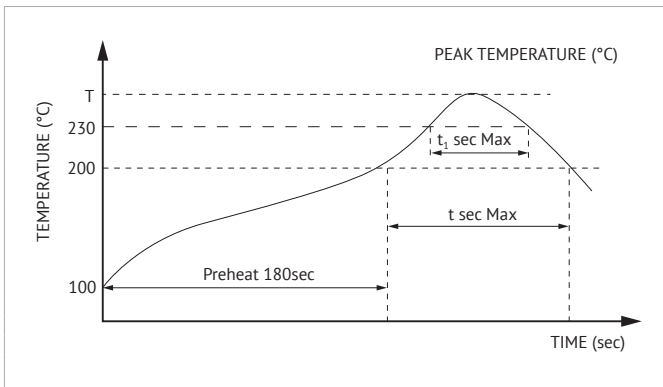

Diameter	T (°C)	t (s)	t1 (s)
4-6,3	255	100	50
8-10	245	100	40
12,5-18	245	100	40

Only 1 reflow soldering cycle allowed. All temperatures are measured on the topside of the Al-can.





WARNING

JIANGHAI is not liable for any extent of possible injuries or damages to persons or things, of any kind, caused by the improper application of and/or operating conditions harmful to electrolytic capacitors. Misapplications which may cause failures include, but are not limited to: ripple current or peak current or voltage above specification, operating voltage above surge voltage specified, temperature exposure outside the specified operating temperature range. Examples of harmful operating conditions comprise, but are not limited to: unusual storage or transport temperatures, excessive and/or rapid changes of ambient temperature or humidity, heavy mechanical shock or vibration, corrosive and abrasive particles in the ambient (cooling) air, conducting dust in the ambient (cooling) air, oil or water vapor or corrosive substances, explosive gas or dust, operation under extremely high or low ambient pressure conditions (below or above sea level), superimposed radio frequency voltages, radioactivity. In case of doubt about the impact of operating conditions on capacitor performance, please contact JIANGHAI.

PERSONAL SAFETY

Electrical or mechanical misapplication of electrolytic capacitors may be hazardous. Personal injury or property damage may result from explosion of a capacitor or from the expulsion of electrolyte due to mechanical disruption or the release of a safety vent of a capacitor. In case of injury or skin or eye exposure to electrolyte, immediately seek professional medical advice. Before using electrolytic capacitors in any application, please read these Handling Precautions, familiarizing thoroughly with the information contained herein. Please check before using any of our electrolytic capacitors if these components fulfill the requirements of your application and that warnings and instructions for use are followed.

WARRANTY

The information contained in this catalogue does not form part of any quotation or contract, is believed to be accurate, reliable and up to date. Quality data are based on the statistical evaluations of a large quantity of parts and do not constitute a guarantee in a legal sense. However, agreement on these specifications does mean that the customer may claim for replacement of individual defective capacitors within the terms of delivery. We will not assume any liability beyond the replacement of defective components. This applies in particular to any consequential damage caused by component failure. Furthermore it must be taken into consideration that the figures stated for lifetime, failure rates and outlier percentages refer to the average production status and are therefore to be understood as mean values (statistic expectations) for a large number of delivery lots of identical capacitors. These figures are based on application experience and data obtained from preceding tests under normal conditions, or – for purpose of accelerated aging – more severe conditions. JIANGHAI reserves the right to change these specifications without prior notice. Any application information given is advisory and does not form part of any specification. The products are not primarily designed for use in life support applications, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. JIANGHAI customers using or selling these products for use in such applications without prior written consent of JIANGHAI do so at their own risk and agree fully to indemnify JIANGHAI for any damage resulting from such improper use or sale. This version of the catalogue supersedes all previous versions. Latest versions of datasheets can be found on our homepage: www.jianghai-europe.com. For more details on precautions and guidelines for aluminum electrolytic capacitors, please refer to CENELEC Technical Report CLC/TR 50454:2008 E, "Guide for the application of aluminum electrolytic capacitors".

POLARITY

Electrolytic capacitors are polar and shall never be used with incorrect polarity, as there is a possible danger of shorting or destruction.

RATED VOLTAGE U_R

The rated voltage is marked on the capacitor and defined in the datasheets as U_R . This voltage should never be exceeded and is the maximum peak voltage including any ripple voltages allowed to avoid a shortening of the lifetime or damage of the capacitor. When a ripple current is applied to the capacitor, the sum of the peak ripple voltage and bias DC voltage shall never exceed the rated voltage. It might be necessary to lower the maximum allowed bias DC voltage, when certain ripple currents are applied to the capacitor.

SURGE VOLTAGE

Maximum voltage, which may be applied to the capacitor for short periods of time: max. 1000 cycles of 30 sec. per 6 min., max. 5 pulses per hour. Capacitance drift +/- 15% max.

REVERSE VOLTAGE

Reverse voltages or voltages < 0V are not allowed.

RECOVERY VOLTAGE

Electric potential between the positive and negative terminal may exist as a result of dielectric absorption. Please take action that this load does not damage other devices or

scare workers during the production process (sparks possible). If needed please discharge the capacitor through a 1k Ω resistor.

TEMPERATURE RANGE

Use electrolytic capacitors only within the specified operating temperature range.

OVER-CURRENT

Currents exceeding the rated ripple currents should be avoided.

RIPPLE CURRENT/VOLTAGE

The combined value of DC voltage and peak AC voltage (due to ripple current) shall not exceed the rated voltage and shall never be < 0V. Use of aluminum electrolytic capacitors under ripple current with wide amplitudes is equivalent to rapid charge-discharge operation.

RAPID CHARGING/DISCHARGING

Rapid charging/discharging generates severe heat and gas may be emitted which may lead to explosion. Consult JIANGHAI about specially designed capacitors suitable for such kind of applications. Example: Servo Drive Application

BALANCING RESISTORS

Balancing resistors should be utilized if capacitors are used in serial connection. Please choose low-tolerance resistors to limit voltage drift.

CHARGE-DISCHARGE PROOF

JIANGHAI capacitors are charge-discharge proof, which means that 10⁶ switching cycles will cause capacitance reduction of less than 10%.

LIFETIME

There are many different lifetime definitions known without any true standard definition. Take special care when capacitors are compared that the capacitors fulfill the needed requirements. JIANGHAI publishes all conditions to be as transparent as possible. In the case of lifetime tests with additional ripple currents, the bias DC voltage must be reduced, so that the sum of bias DC voltage and the peak of the ripple voltage does not exceed the Rated Voltage U_R .

Load life: Period of time, during which the technical parameters of all capacitors stay within the given limits. JIANGHAI defines this without allowing for outliers.

Shelf Life: Definition of time with acceptable drift of capacitor parameters after storage at upper category temperature without load.

VIBRATION AND MECHANICAL STRESS

Capacitors are sensitive to vibration and mechanical forces applied on the leads. Do not use capacitors, which have been dropped onto a rigid surface.

INSULATION

If any defect of the sleeve is visible, the component should not be used – the same holds for any kind of visible damage. A capacitor should be electrically isolated from the following parts: aluminum case, cathode lead wire, anode lead wire and circuit pattern, and auxiliary terminal of snap-in type. The sleeve is not recognized as an isolator and therefore the standard capacitor should not be used in a place where insulation function is needed. Please contact JIANGHAI if a higher grade of insulation is required.

ENVIRONMENTAL CONDITIONS

Avoid direct contact with water, salt solution, oil, dewing conditions. Halogens generally, especially fumigation treatment with bromides and flame retardant agents containing halogens must be avoided. Avoid exposing to direct sunshine, ozone, ultraviolet rays and x-ray radiation. Air Pressure: Max. 150kPa, min. 8kPa. For usage >2000m altitude above sea level current deratings might be necessary. No heavy air pressure changes are allowed. Do not use or store in an environment containing any hazardous gas (e.g., hydrogen sulphide, sulphurous acid, nitrous acid, chlorine, ammonia, bromine, methyl bromide, other halogens) or acidic or alkaline solutions.

STORAGE

Temperature 5 to 35°C, relative humidity below 75%. Electrolytic capacitors may accumulate charge naturally during storage. In this case discharge through a 1kOhm resistor before use (Recovery voltage). Leakage current may be increased after long storage time. In this case the capacitor should be subjected to the rated voltage treatment through a 1kOhm resistor before use for 1 hour, then it should be discharged through a resistor of about 1 Ohm/Volt. Storage times above 1 year should be avoided or rated voltage treatment may be necessary. In accordance to IEC 60384-4 electrolytic capacitors are subject to a reforming process before acceptance testing. Rated voltage is applied via a series resistance (100 Ω : $U_R \leq 100VDC$, 1k Ω : $U_R > 100VDC$).

SOLDERING

Soldering conditions (temperature, times) should be within specified conditions, especially for SMD components. Avoid high soldering temperatures as this may reduce lifetime or damage the capacitor. Do never dip the capacitor body into molten solder. Flux should not be adhered to the capacitor's body but only to its terminals. For details and different methods please contact us.



**GLUEING, CLEANING AND COATING**

Do not use fixing agents or cleaning substances containing halogens. Do not use coating and moulding components that completely seal the capacitor from the environment. Also, never use solvents containing: halogenated hydrocarbons, alkali, petroleum, trichloroethylene/-ethane, xylene, acetones, trichlorotrifluoroethane, tetrachloroethylene, methylenechloride, chloroform, acetates, ketones, esters, chlorides and bromides.

MOUNTING

Other devices, which are mounted near the capacitor, should not touch the capacitor. Additional heat coming from other components near the capacitor may reduce the lifetime of the capacitor. Do never bend or twist the capacitor after soldering to avoid stress on the leads. Capacitors are not protected against mechanical forces on the leads. Forces on the pins might damage the capacitor. No printed circuit board tracks are allowed between the lead pads of the capacitor.

TRANSPORT

Avoid fumigation and spraying insecticides (especially with bromides) in the import or export procedures which can cause corrosion. This applies also to the finished devices.

MAINTENANCE

Periodical inspection should be carried out for the capacitor: visual inspection to check pressure relief open or leakage of electrolyte, electrical characteristics as leakage current, capacitance, and dissipation factor.

ELECTROLYTE AND SEPARATOR PAPER

Electrolyte and separator paper used in aluminum capacitors may be flammable. Also, electrolyte is electrically conductive. Therefore, in case electrolyte gets in contact with PC board it may cause corrosion of circuit pattern or cause short circuit between patterns, and may lead to smoke generation or ignition in worst case.

CAUTION DURING USE OF CAPACITORS

Do not touch the terminals of capacitors. Keep the capacitor free from conductive solution, such as acids, alkali and so on. Ensure that the operating environment of the equipment into which the capacitor has been built is within the specified conditions mentioned in the catalogue or specification sheets.

SAFETY VENT

The safety vent needs some free space to open properly. Allow for free headroom of at least 2mm for diameter ≤16mm, more than 3mm for diameter 18-35mm, more than 5mm for case diameter 40mm and larger.

EMERGENCY ACTIONS

When the pressure relief vent is open and some gas blows out from the capacitor, please turn the main switch of the equipment off or pull out the plug from the power outlet immediately. During safety vent operation, extremely hot gas (>100°C) may blow out of the capacitors. Do not stand close to the capacitors. In case of eye contact, rinse the open eye(s) with clean water immediately. In case of ingestion, gargle with water immediately, do not swallow. Do not touch electrolyte but wash skin with soap and water in case of skin contact.

DEFINITION OF ELECTRICAL PARAMETERS

Separate documents as application notes, equivalent circuit diagrams and so on are available on request.

PACKAGING

Please refer to the data book for details. Further information is available on request.

DISPOSAL

Scrapped capacitors are classified as scrapped metal. For disposal they are handled as controllable industrial waste because of the nature of the contents (electrolyte). Most of the material is aluminum and cannot be completely burned.

Jianghai Europe Electronic Components GmbH

VERSION 10/2021

